



PRICE BOULEVARD

FROM EAST OF SUMTER BOULEVARD
TO WEST OF TOLEDO BLADE BOULEVARD

WELCOME

to the Public Forum for the Price Boulevard Widening
From East of Sumter Boulevard to West of Toledo Blade Boulevard



FORUM DATE & LOCATION


Wednesday, November 16, 2016
10:00 a.m. - 11:00 a.m. Open House

City of North Port Public Works Office
1100 N Chamberlain Boulevard
North Port, FL 34286

Public participation is solicited without regard to race, color, national origin, age, sex, religion, disability or family status.

Price Boulevard Widening Overview

- Project Limits: East of Sumter to West of Toledo Blade

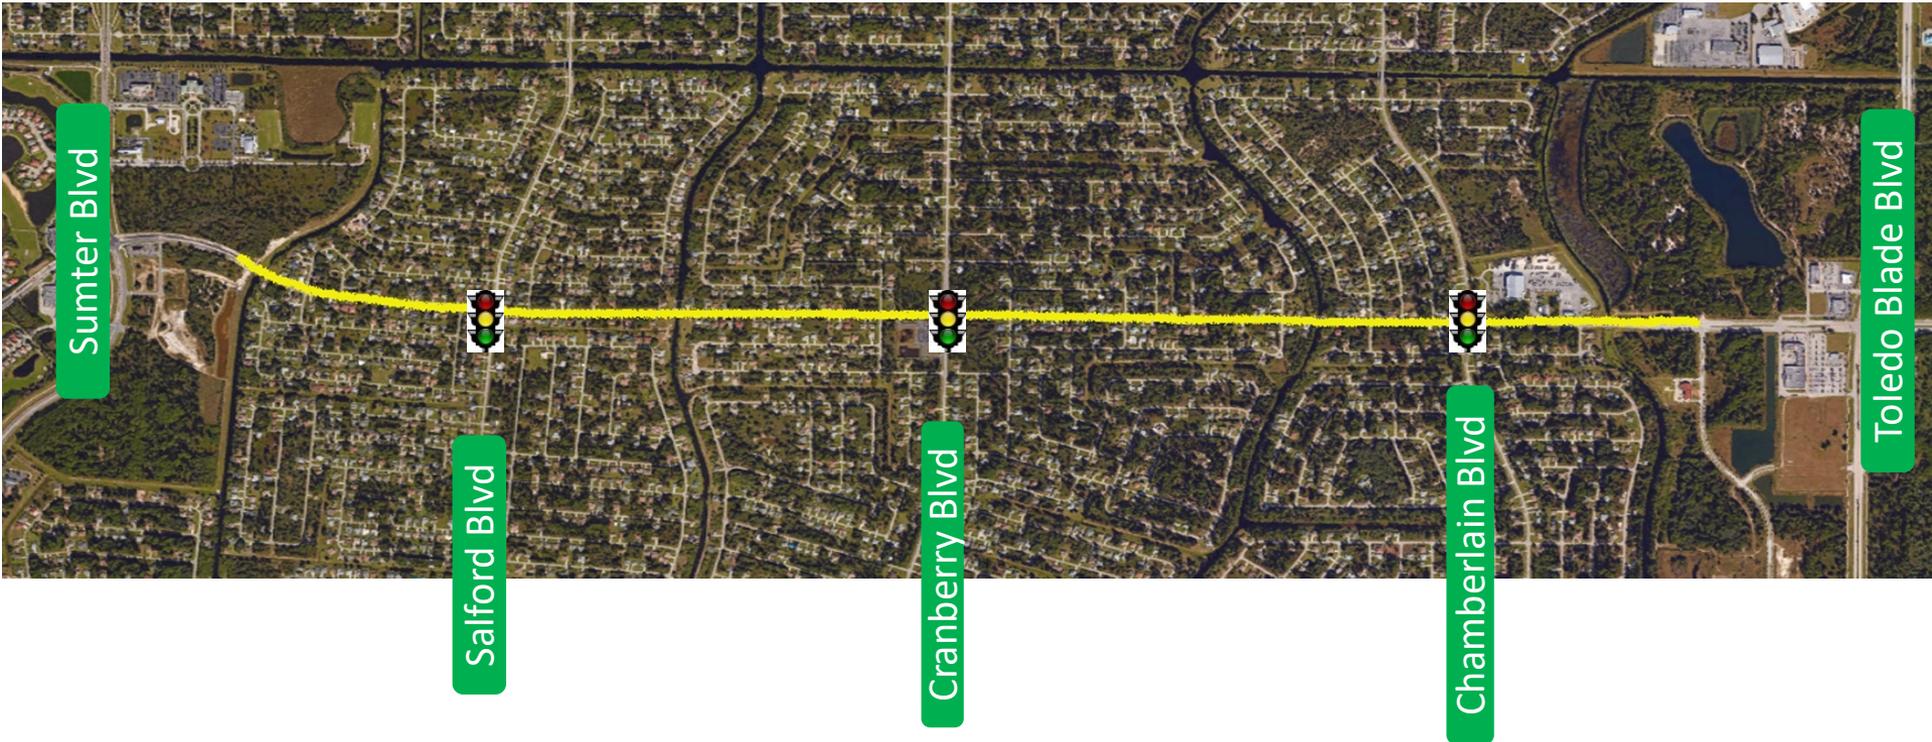



Activity	Estimated Cost
★ Planning & Design	\$ 3,351,270
★ Land Acquisition	\$ 2,000,000
Construction	\$25,375,000
TOTAL	\$30,726,270

Project Scope

- Widen from 2 lanes to 4 lanes with:
 - Bike lanes
 - Raised median
 - Curb and Gutter
 - Sidewalks
 - Lighting
 - Landscaping
 - Signals
 - Utility improvements
- Project distance is approximately 2.75 miles
- Posted speed limit will be 35 mph

Widen from 2 lanes to 4 lanes with:

-Lighting

-Signals


- Landscaping



Raised Median

Bike Lane

**Sidewalks ;
Curb & Gutter**

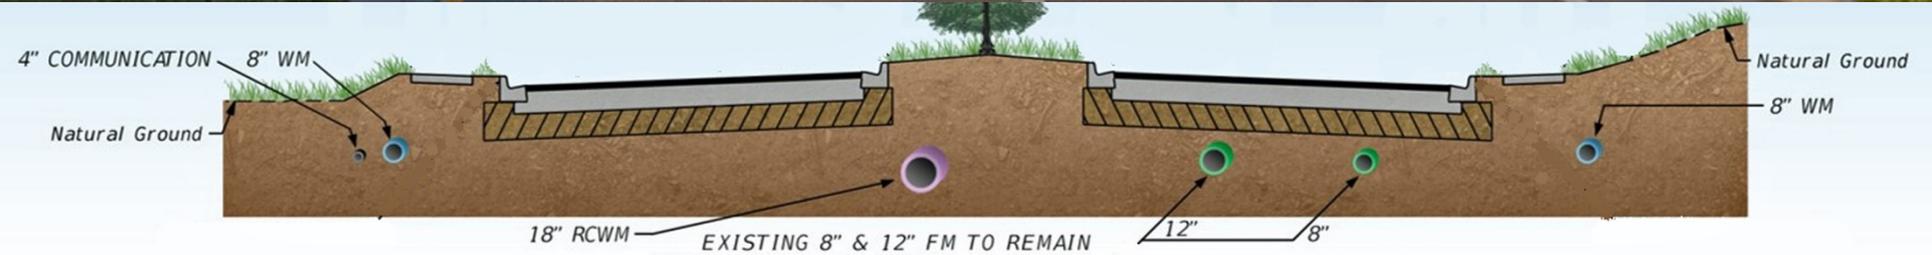

Access with Median



North Port Unified Land Development Code (ULDC)

Sidewalk Width


- ULDC requires 8'
- More user friendly
- Accommodates more concurrent use

Right-of-Way

- ULDC requires 120'

Bike Lane Width

- ULDC requires 5'
- Safer for bicyclists
- More room for U-turns than narrower width

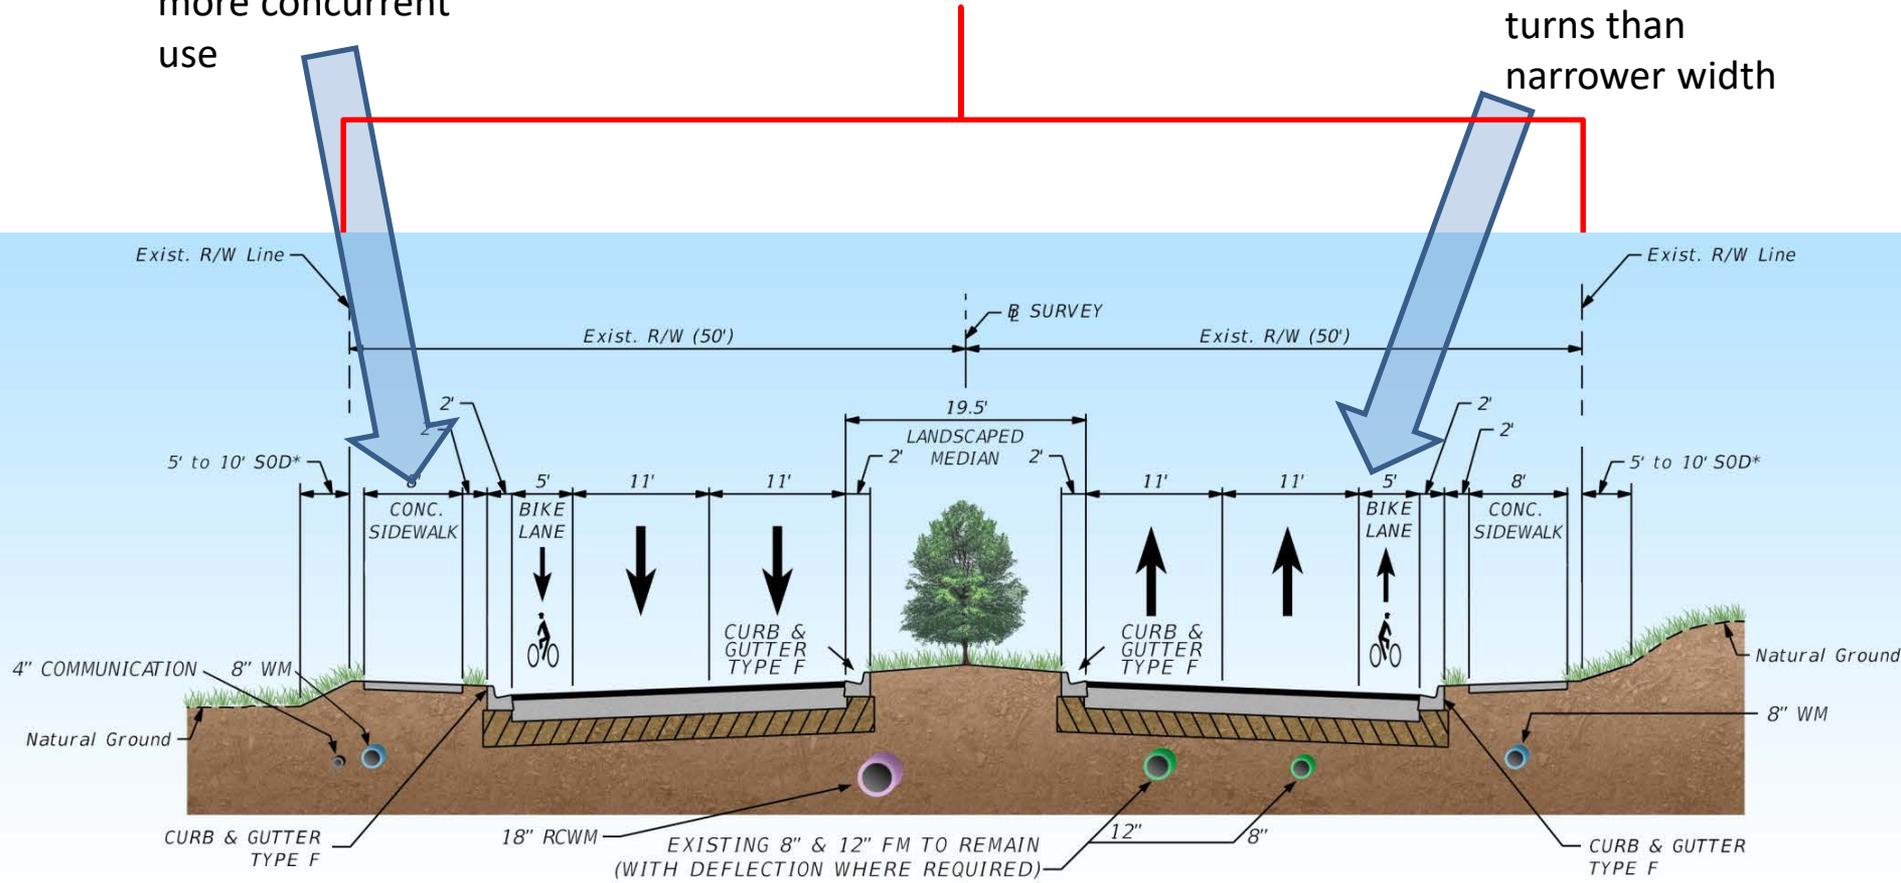



W Price Blvd

Existing
Right-of-
way
100 ft.

Modified Recommended Typical Section

Sidewalk Width


- 5' wide with a 2' utility strip
- Accommodates mailboxes
- Provides 5.25' at back of sidewalk to harmonize grading with adjacent properties
- Minimizes need for slope easements

Median Width

- 19.5' wide
- Accommodates U-turns by passenger vehicles and standard pick-up trucks

Bike Lane Width

- 4' wide
- Meets current design standards (FDOT Greenbook)

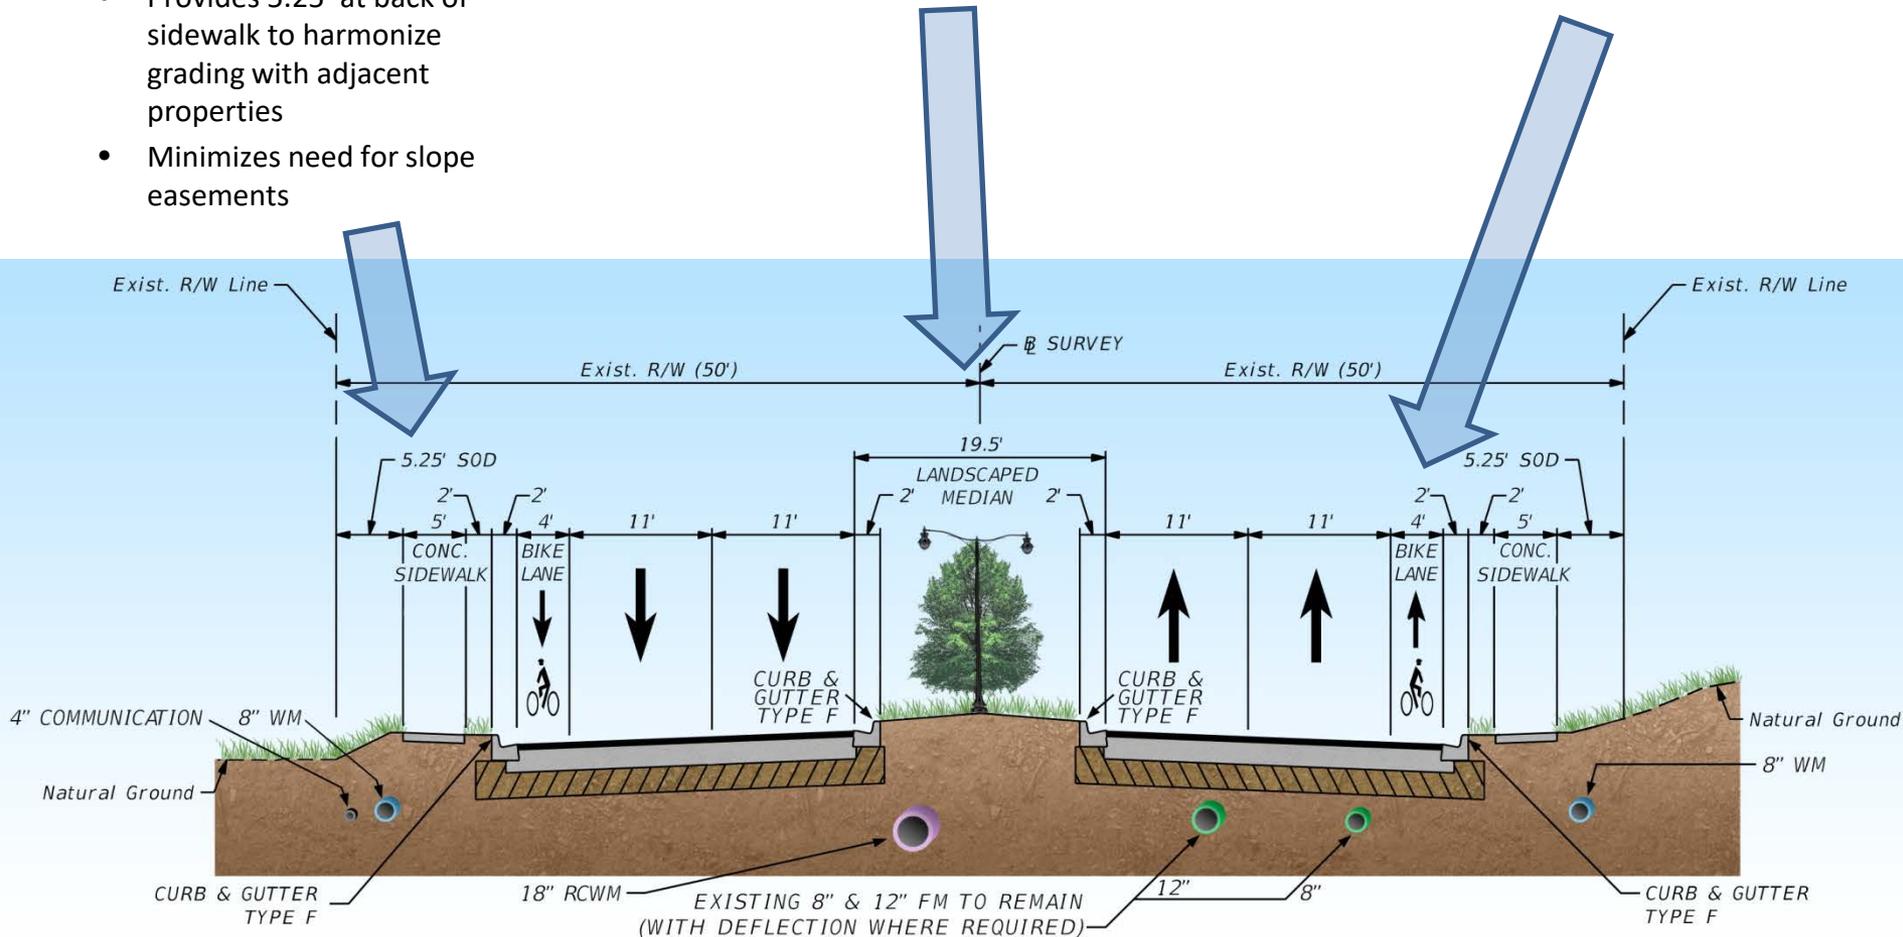

Current Project Activities

- Survey is complete
- Preliminary design is underway for:
 - Roadway
 - Drainage (piping and ponds)
 - Utilities
- Design is expected to be complete in Fall 2017

SHRUBS AND GROUNDCOVER



Trachelospermum asiaticum 'Minima' (Asiatic Jasmine)



Ilex vomitoria 'Stokes Dwarf' (Dwarf Yaupon Holly)



Dianella tasmanica (Flax Lily)



Arachis glabrata 'Ecoturf' (Perennial Peanut)



Asparagus densiflorus 'Meyers' (Foxtail Fern)



Viburnum obovatum 'Mrs. Shillers Delight'
(Dwarf Walters Viburnum)



Muhlenbergia capillaris (Muhly Grass)



Bougainvillea 'Helen Johnson' (Dwarf Bougainvillea)



Ilex vomitoria 'Stokes Dwarf' (Dwarf Yaupon Holly)



Raphiolepis indica (Indian Hawthorn)



Myrcianthes fragrans (Simpson's Stopper)



Schefflera arboricola 'Trinette' (Var. Arboricola)

GATEWAY | INTERSECTION TREES AND PALMS



Phoenix sylvestris (Wild Date Palm)



Lagerstroemia indica (Crape Myrtle)



Ligustrum japonicum (Japanese Privet)

MEDIAN TREES AND PALMS



Livistona decora (Ribbon Palm)



Lagerstroemia indica (Crape Myrtle)

MEDIAN TREES AND PALMS (CONT.)



Ilex attenuata 'Eagleston' (Eagleston Holly)



Quercus virginiana 'High Rise' (High Rise Live Oak)



Tabebuia heterophylla (Pink Trumpet Tree)



Liquidambar styraciflua (Sweetgum)



Eriobotrya japonica (Loquat)

What's Next

- Recommendation to Commission
- Design Roadway
- Final Design
Public Meeting



A close-up photograph of a person's hand holding a white rectangular card. The card is partially inserted into a circular hole in a bright red surface. The card has the words "Comment Card" printed in a bold, black, serif font. Below this, the phrase "We want to hear from you..." is written in a smaller, black, cursive font. The background is a solid, vibrant red color.

Comment Card

"We want to hear from you..."